IMEX
BATH EQUIPMENTS


PRODUCT INFORMATION SUMMARY

DELOS
Series



Ref.	EAN	Finish
BDD055/AC	8435668037914	316


DELOS
Series

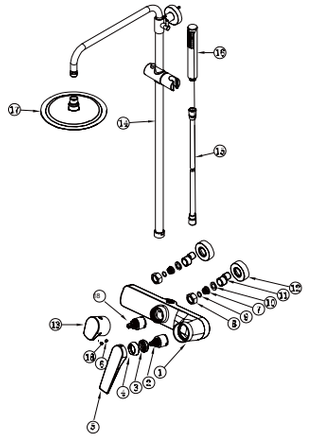


CODE	NAME	MATERIAL	REF
1	Faucet body	Brass	
2	Cartridge Ø30mm	Assembly	CRT088
3	Cap	Brass	
4	Decorative cover plate	Brass	
5	Handle	Zinc	
6	Screw	SUS 304	
7	O-ring	NBR	
8	Hexagon nut	Brass	
9	Water level screw	Brass	
10	O-ring	NBR	
11	Cabrio leg	SUS 304	
12	Cover plate	SUS 304	
13	Diverter handle	Zinc	
14	Shower pipe	SUS 304	RR0011/AC
15	Shower hose	SUS304/PVC	FLX005/AC
16	Shower hand	ABS	MDR015/AC
17	Shower head	SUS 304	RDN001/AC
18	Diverter cartridge	Assembly	CRT071
* CONSULTAR PARA ACABADOS DE COLOR			

DELOS
Series

Shower set installing instruction



Step 1.Connect curved leg with the inlet pipe inside the wall



Step 2.Connect decorate cover to curved leg



Step 3.Install shower faucet properly,and connect to curved leg on the wall



Step 4.Install shower pipe according to the distance of fix part





Step 5.Instatll shower hand and shower head to the set



Step 6.Test function of shower set,clean the set

Useage function instruction





Shower hand functions selection


Choose the function personally




FLOW RATE

Detalles	
FLOW RATE REF	BDD055/AC
hand shower mixer water 0.1Mpa(L/MIN)	2.75
hand shower mixer water 0.3Mpa(L/MIN)	7.7
hand shower mixer water 0.5Mpa(L/MIN)	11.4
hand shower singer cold water 0.1Mpa(L/MIN)	2.6
hand shower singer cold water 0.3Mpa(L/MIN)	7.1
hand shower singer cold water 0.5Mpa(L/MIN)	10.2
shower head mixer water 0.1Mpa(L/MIN)	4.3
shower head mixer water 0.3Mpa(L/MIN)	11.6
shower head mixer water 0.5Mpa(L/MIN)	16
shower head singer cold water 0.1Mpa(L/MIN)	3.7
shower head singer cold water 0.3Mpa(L/MIN)	9.9
shower head singer cold water 0.5Mpa(L/MIN)	13.7


hand shower



shower head



DELOS
Series

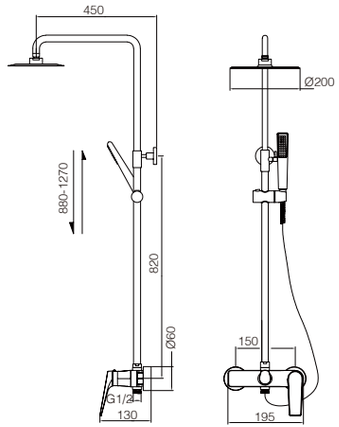

Units： mm

Product sizes (cm)	14*90.5*42.5
Weight (kg)	4.88
Guarantee	10 years
Max Preassure (bar)	6
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85ºC
Min temperature	65ºC

DELOS
Series

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.