IMEX
BATH EQUIPMENTS

PRODUCT INFORMATION SUMMARY

DELOS
Series

IMEX
BATH EQUIPMENTS

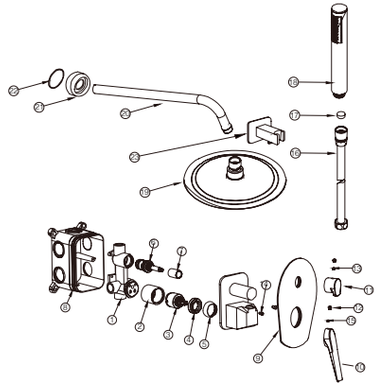




Ref.	EAN	Finish
GPD055/AC	8435668038737	316

DELOS
Series







IMEX
BATH EQUIPMENTS



CODE	NAME	MATERIAL	REF
1	Faucet body	Brass	
2	Cartridge cover	Brass	
3	Cartridge Ø30mm	Assembly	CRT0088*
4	Cap	Brass	
5	Decorative cover plate	Brass	
6	Diverter cartridge	Assembly	CRT100*
7	Diverter cartridge cover	Brass	
8	Concealed box	ABS	
9	Cover plate	SUS 304	
10	Handle	Zinc	
11	Diverter handle	Zinc	
12	Color button	ABS	
13	Screw	SUS 304	
14	Color button	ABS	
15	Screw	SUS 304	
16	Shower hose	PVC	FLX005/AC*
17	O-ring	NBR	
18	Shower hand	ABS	MDR015/AC*
19	Shower head	SUS 304	RDN002/AC*
20	Wall pipe	SUS 304	BPR001/AC*
21	Cover plate of wall pipe	SUS 304	
22	Shower seat	Brass	SFD002/AC*
* CONSULTAR PARA ACABADOS DE COLOR			

DELOS
Series


IMEX
BATH EQUIPMENTS

Installing instruction		
 Step 1.Connect curved leg with the inlet pipe inside the wall	 Step 2.Connect decorate cover to curved leg	 Step 3.Install shower faucet properly,and connect to curved leg on the wall
 Step 4.Install shower pipe according to the distance of fix part	 Step 5.Instatll shower hand and shower head to the set	 Step 6.Test function of shower set,clean the set


FLOW RATE

Detalles	
FLOW RATE REF	GPD055/AC
hand shower mixer water 0.1Mpa(L/MIN)	3.3
hand shower mixer water 0.3Mpa(L/MIN)	8.3
hand shower mixer water 0.5Mpa(L/MIN)	11.5
hand shower singer cold water 0.1Mpa(L/MIN)	3.1
hand shower singer cold water 0.3Mpa(L/MIN)	7.9
hand shower singer cold water 0.5Mpa(L/MIN)	10.9
shower head mixer water 0.1Mpa(L/MIN)	4.8
shower head mixer water 0.3Mpa(L/MIN)	10.3
shower head mixer water 0.5Mpa(L/MIN)	15.2
shower head singer cold water 0.1Mpa(L/MIN)	4.3
shower head singer cold water 0.3Mpa(L/MIN)	9.5
shower head singer cold water 0.5Mpa(L/MIN)	14


hand shower



shower head



DELOS
Series

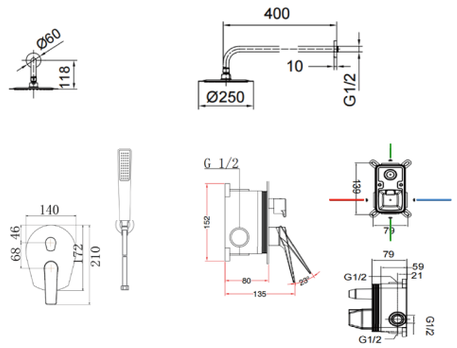

Units： mm

Product sizes (cm)	43*30*14
Weight (kg)	3.82
Guarantee	10 years
Max Preassure (bar)	6
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85ºC
Min temperature	65ºC

DELOS
Series

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.