IMEX
BATH EQUIPMENTS

# PRODUCT INFORMATION SUMMARY

**MOSCU**
Series


IMEX
BATH EQUIPMENTS



| Ref. | EAN | Finish |
|---|---|---|
| GPK034 | 8435668004497 | Acero S316 |

**MOSCU**
Series

IMEX
BATH EQUIPMENTS

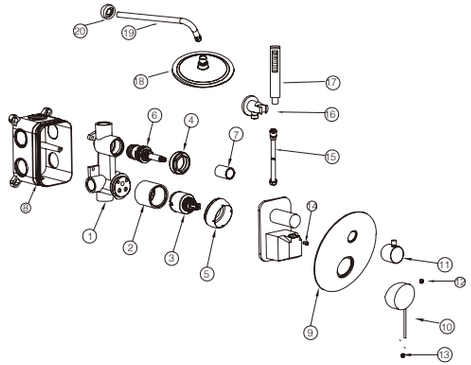



| CODE | NAME | MATERIAL | REF |
|---|---|---|---|
| 1 | Faucet body | SUS 316 | |
| 2 | Cartridge cover | SUS 316 | |
| 3 | Cartridge Ø35mm | Assembly | CRT001* |
| 4 | Cap | SUS 316 | |
| 5 | Decorative cover plate | SUS 316 | |
| 6 | Diverter cartridge | Assembly | CRT089* |
| 7 | Diverter cartridge cover | SUS 316 | |
| 8 | Concealed box | ABS | |
| 9 | Cover plate | SUS 316 | |
| 10 | Handle | SUS 316 | |
| 11 | Diverter handle | SUS 316 | |
| 12 | Color button | ABS | |
| 13 | Screw | SUS 304 | |
| 14 | Screw | SUS 304 | |
| 15 | Shower hose | SUS 316 | FLX005/AC* |
| 16 | Shower seat | SUS 316 | SFD002/AC* |
| 17 | Shower hand | SUS 316 | MDR015/AC* |
| 18 | Shower head | SUS 316 | RDN002/AC* |
| 19 | Wall pipe | SUS 316 | BPR001/AC* |
| 20 | Cover plate of wall pipe | SUS 316 | |
| * CONSULTAR PARA ACABADOS DE COLOR | | | |


**MOSCU**
Series

IMEX
BATH EQUIPMENTS


## Installing instruction





Step 1.Connect curved leg with the inlet pipe inside the wall





Step 2.Connect decorate cover to curved leg





Step 3.Install shower faucet properly,and connect to curved leg on the wall



Step 4.Install shower pipe according to the distance of fix part



Step 5.Instatll shower hand and shower head to the set





Step 6.Test function of shower set,clean the set


## FLOW RATE

| Detalles | |
|---|---|
| FLOW RATE REF | GPK034 |
| hand shower mixer water 0.1Mpa(L/MIN) | 3.7 |
| hand shower mixer water 0.3Mpa(L/MIN) | 10.56 |
| hand shower mixer water 0.5Mpa(L/MIN) | 14.93 |
| hand shower singer cold water 0.1Mpa(L/MIN) | 2.9 |
| hand shower singer cold water 0.3Mpa(L/MIN) | 8.07 |
| hand shower singer cold water 0.5Mpa(L/MIN) | 11.3 |
| shower head mixer water 0.1Mpa(L/MIN) | 4.27 |
| shower head mixer water 0.3Mpa(L/MIN) | 11.2 |
| shower head mixer water 0.5Mpa(L/MIN) | 15.5 |
| shower head singer cold water 0.1Mpa(L/MIN) | 3.14 |
| shower head singer cold water 0.3Mpa(L/MIN) | 8.6 |
| shower head singer cold water 0.5Mpa(L/MIN) | 11.9 |


hand shower




shower head




**MOSCU**
Series

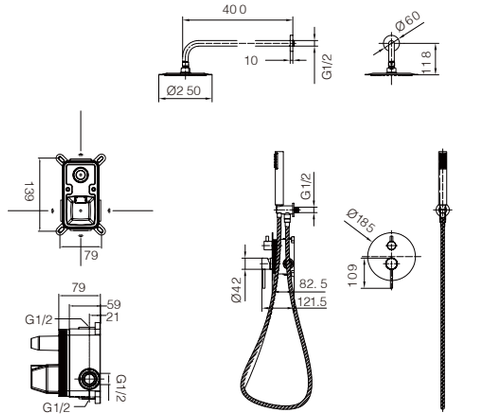


| | |
|---|---|
| Product sizes (cm) | 43*30*14 |
| Weight (kg) | 4.29 |
| Guarantee | 10 years |
| Max Preassure (bar) | 5 |
| Min Preassure (bar) | 0.5 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature | 85ºC |
| Min temperature | 65ºC |

**MOSCU**
Series

**CERTIFIES**

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

*Requirements and exclusions*

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical depMOSCUment is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing pMOSCUs such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

IMEX
BATH EQUIPMENTS

# PRODUCT INFORMATION SUMMARY

**MOSCU**
Series

IMEX
BATH EQUIPMENTS






| Ref. | EAN | Finish |
|---|---|---|
| GTK034 | 8435668003988 | Acero S316 |

**MOSCU**
Series

IMEX
BATH EQUIPMENTS

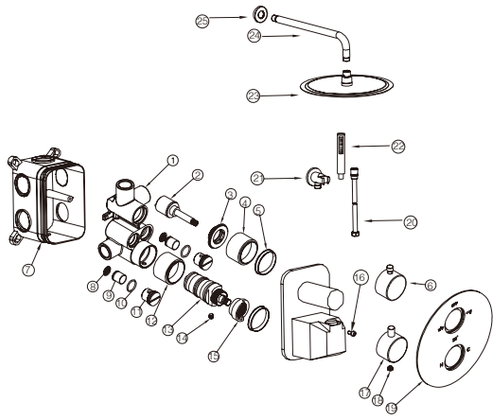



| CODE | NAME | MATERIAL | REF | CODE | NAME | MATERIAL | REF |
|---|---|---|---|---|---|---|---|
| 1 | Faucet body | SUS316 | | 20 | Shower hose | SUS 316 | FLX005/AC* |
| 2 | Diverter cartridge | Assembly | CRT086* | 21 | Shower seat | SUS 316 | SFD002/AC* |
| 3 | cap | SUS316 | | 22 | Shower hand | SUS 316 | MDR015/AC* |
| 4 | Cartridge cover | SUS316 | | 23 | Shower head | SUS 316 | RDN002/AC* |
| 5 | Wearing ring | ABS | | 24 | Wall pipe | SUS 316 | BPR001/AC* |
| 6 | Diverter handle | SUS316 | | 25 | Cover plate | SUS 316 | |
| 7 | Concealed box | ABS | | | | | |
| 8 | Strainer | SUS316 | | | | | |
| 9 | Check value | ABS | | | | | |
| 10 | Flat gasket | NBR | | | | | |
| 11 | Conncetor | SUS316 | | | | | |
| 12 | Cartridge cover | SUS316 | | | | | |
| 13 | Cartridge Ø35mm | Assembly | CRT012* | | | | |
| 14 | Screw | SUS304 | | | | | |
| 15 | Ring | ABS | | | | | |
| 16 | Screw | SUS304 | | | | | |
| 17 | Open handle | SUS316 | | | | | |
| 18 | Color button | ABS | | | | | |
| 19 | Cover plate | SUS316 | | | | | |
| * CONSULTAR PARA ACABADOS DE COLOR | | | | | | | |

**MOSCU**
Series

IMEX
BATH EQUIPMENTS


## Installing instruction





Step 1.Connect curved leg with the inlet pipe inside the wall




Step 2.Connect decorate cover to curved leg





Step 3.Install shower faucet properly,and connect to curved leg on the wall



Step 4.Install shower pipe according to the distance of fix part



Step 5.Instatll shower hand and shower head to the set





Step 6.Test function of shower set,clean the set


## FLOW RATE

| Detalles | |
|---|---|
| FLOW RATE REF | GTK034 |
| hand shower mixer water 0.1Mpa(L/MIN) | 2.3 |
| hand shower mixer water 0.3Mpa(L/MIN) | 7.2 |
| hand shower mixer water 0.5Mpa(L/MIN) | 10 |
| hand shower singer cold water 0.1Mpa(L/MIN) | 2 |
| hand shower singer cold water 0.3Mpa(L/MIN) | 6.2 |
| hand shower singer cold water 0.5Mpa(L/MIN) | 8.8 |
| shower head mixer water 0.1Mpa(L/MIN) | 2.6 |
| shower head mixer water 0.3Mpa(L/MIN) | 7.6 |
| shower head mixer water 0.5Mpa(L/MIN) | 10.8 |
| shower head singer cold water 0.1Mpa(L/MIN) | 2.1 |
| shower head singer cold water 0.3Mpa(L/MIN) | 6.3 |
| shower head singer cold water 0.5Mpa(L/MIN) | 9.2 |


hand shower




shower head




**MOSCU**
Series

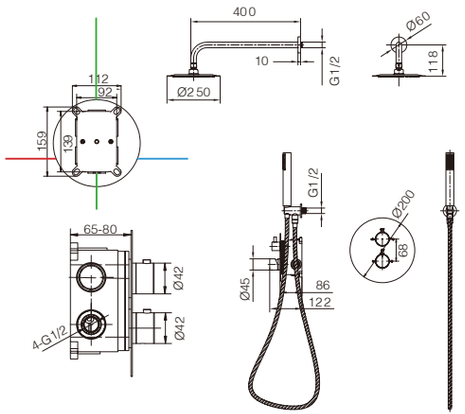


| | |
|---|---|
| Product sizes (cm) | 43*30*14 |
| Weight (kg) | 4.5 |
| Guarantee | 10 years |
| Max Preassure (bar) | 5 |
| Min Preassure (bar) | 0.5 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature | 85ºC |
| Min temperature | 65ºC |

**MOSCU**
Series

**CERTIFIES**

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

*Requirements and exclusions*

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical depMOSCUment is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing pMOSCUs such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

IMEX
BATH EQUIPMENTS

# PRODUCT INFORMATION SUMMARY

**MOSCU**
Series


IMEX
BATH EQUIPMENTS



| Ref. | EAN | Finish |
|---|---|---|
| BDK034-4 | 8435668005708 | Acero S316 |

**MOSCU**
Series

IMEX
BATH EQUIPMENTS

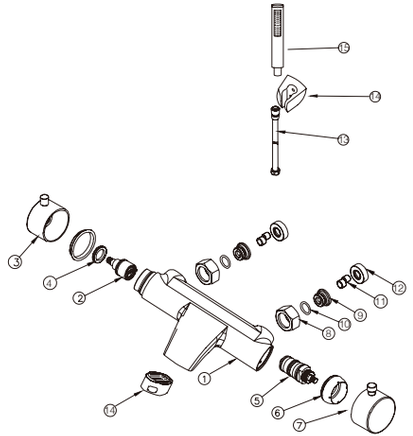



| CODE | NAME | MATERIAL | REF |
|---|---|---|---|
| 1 | Faucet body | SUS 316 | |
| 2 | Diverter cartridge | Assembly | |
| 3 | Diverter handle | SUS 316 | |
| 4 | Cap | SUS 316 | |
| 5 | Cartridge Ø35mm | Assembly | CRT012* |
| 6 | Decorative cover plate | SUS 316 | |
| 7 | Open handle | SUS 316 | |
| 8 | Hexagon nut | SUS 316 | |
| 9 | Water level screw | SUS 316 | |
| 10 | O-ring | NBR | |
| 11 | Cabrio leg | SUS 316 | |
| 12 | Cover plate | SUS 316 | |
| 13 | Shower hose | SUS 316 | FLX005/AC* |
| 14 | Shower seat | SUS 316 | SMD007/AC* |
| 15 | Shower hand | SUS 316 | MDR015/AC* |
| * CONSULTAR PARA ACABADOS DE COLOR | | | |


**MOSCU**
Series

IMEX
BATH EQUIPMENTS


## Installing instruction




Step 1.Connect curved leg with the inlet pipe inside the wall




Step 2.Connect decorate cover to curved leg





Step 3.Install shower faucet properly,and connect to curved leg on the wall



Step 4.Test function of shower set, clean the set

## Useage function instruction





## FLOW RATE

| Detalles | |
|---|---|
| FLOW RATE REF | BDK034-4 |
| water outlet mixer water 0.1Mpa(L/MIN) | 3 |
| water outlet mixer water 0.3Mpa(L/MIN) | 8 |
| water outlet mixer water 0.5Mpa(L/MIN) | 11 |
| water outlet singer cold water 0.1Mpa(L/MIN) | 2.5 |
| water outlet singer cold water 0.3Mpa(L/MIN) | 7 |
| water outlet singer cold water 0.5Mpa(L/MIN) | 10.1 |
| hand shower mixer water 0.1Mpa(L/MIN) | 2.16 |
| hand shower mixer water 0.3Mpa(L/MIN) | 6.9 |
| hand shower mixer water 0.5Mpa(L/MIN) | 9.83 |
| hand shower singer cold water 0.1Mpa(L/MIN) | 1.8 |
| hand shower singer cold water 0.3Mpa(L/MIN) | 6 |
| hand shower singer cold water 0.5Mpa(L/MIN) | 8.6 |


water outlet




hand shower




**MOSCU**
Series




| | |
|---|---|
| Product sizes (cm) | 32.5*20.5*14.2 |
| Weight (kg) | 2.86 |
| Guarantee | 10 years |
| Max Preassure (bar) | 5 |
| Min Preassure (bar) | 0.5 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature | 85ºC |
| Min temperature | 65ºC |

**MOSCU**
Series

**CERTIFIES**

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

*Requirements and exclusions*

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical depMOSCUment is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing pMOSCUs such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.

IMEX
BATH EQUIPMENTS

# PRODUCT INFORMATION SUMMARY

**MOSCU**
Series


IMEX
BATH EQUIPMENTS



| Ref. | EAN | Finish |
|---|---|---|
| GLT023/AC | 8435668004664 | Acero S316 |

**MOSCU**
Series

IMEX
BATH EQUIPMENTS

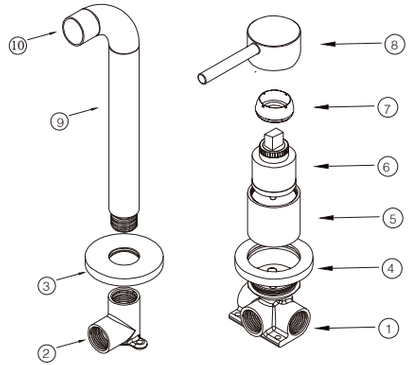



| CODE | NAME | MATERIAL | REF |
|---|---|---|---|
| 1 | Faucet body | SUS 316 | |
| 2 | Faucet body | SUS 316 | |
| 3 | Cover plate | SUS 316 | |
| 4 | Cover plate | SUS 316 | |
| 5 | Cartridge cover | SUS 316 | |
| 6 | Cartridge Ø35mm | Assembly | CRT006* |
| 7 | Cap | SUS 316 | |
| 8 | Handle | SUS 316 | |
| 9 | Pipe | SUS 316 | |
| 10 | Perlator M18,5x1 | ABS | SAT-AIR018* |
| * CONSULTAR PARA ACABADOS DE COLOR | | | |


**MOSCU**
Series

IMEX
BATH EQUIPMENTS


## Installing instruction





Step 1.Check all spare parts
1-pipe
2-body to handle
3-handle
4-cover plate of handle
5-cover plate of pipe
6-body to pipe
7-spare part bag




Step 2.Dig hole for body to handle
2.1-Hole size 50*50mm,depth from 45 to 75mm
2.2-Dig two 6mm holes with 54mm distance
2.3- Assemble spare parts as picture shows





Step 3.Dig hole for body to pipe
3.1-Hole size 45*45mm,depth 40mm
3.2-Dig two 6mm holes with 35mm distance
3.3-Assemble spare partsas picture shows




Step 4.Connect inside pipe and test for leak checking

## FLOW RATE

| Detalles | |
|---|---|
| FLOW RATE REF | GLT023/AC |
| mixer water 0.1Mpa(L/MIN) | 3.9 |
| mixer water 0.3Mpa(L/MIN) | 10.65 |
| mixer water 0.5Mpa(L/MIN) | 14.7 |
| singer cold water 0.1Mpa(L/MIN) | 2.9 |
| singer cold water 0.3Mpa(L/MIN) | 7.87 |
| singer cold water 0.5Mpa(L/MIN) | 11 |

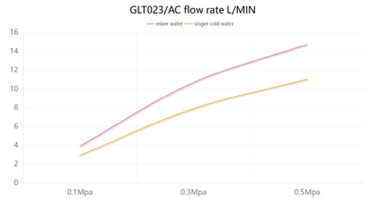


**MOSCU**
Series




| | |
|---|---|
| Product sizes (cm) | 29.5*17.5*7.2 |
| Weight (kg) | 1.16 |
| Guarantee | 10 years |
| Max Preassure (bar) | 5 |
| Min Preassure (bar) | 0.5 |
| Optimum preassure (bar) | 1-4 (Recommended 3) |
| Max. temperature | 85ºC |
| Min temperature | 65ºC |

**MOSCU**
Series

### CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

*Requirements and exclusions*

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical depMOSCUment is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing pMOSCUs such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.