IMEX
BATH EQUIPMENTS

PRODUCT INFORMATION SUMMARY

DINAMARCA
Series

IMEX
BATH EQUIPMENTS








Ref.	EAN	Finish
BDR031-4	8435668034517	Chrome
BDR031-4NG	8435668034531	Matte black
BDR031-4BL	8435668034524	White

DINAMARCA
Series

IMEX
BATH EQUIPMENTS

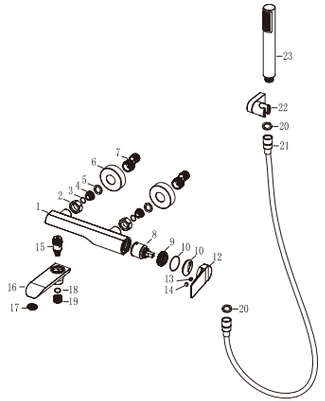


CODE	NAME	MATERIAL	REF	CODE	NAME	MATERIAL	REF
1	Body	Brass		20	Rubber washer	NBR	
2	Nut	Brass		21	Hose	SUS 304 / PVC	FLX010*
3	O-ring	NBR		22	Shower base	ABS	SMD007*
4	Valve	SUS 304		23	Shower hand	ABS	MDR015*
5	Rubber washer	NBR					
6	Cover	SUS 304					
7	Cabrio leg	SUS 304					
8	Cartridge	35mm	CRT006*				
9	Nut	Brass					
10	O-ring	NBR					
11	Decorative cup	ABS					
12	Handle	Zinc					
13	Screw	SUS 304					
14	Button	ABS					
15	Cartridge	Brass 124mm					
16	Outlet pipe	Brass					
17	Aerator	M24x1mm	SAT-AIR019*				
18	O-ring	NBR					
19	Connect	Brass					
* CONSULTAR PARA ACABADOS DE COLOR							


DINAMARCA
Series

IMEX
BATH EQUIPMENTS


Installing instruction



Step 1.Connect curved leg with the inlet pipe inside the wall



Step 2.Connect decorate cover to curved leg





Step 3.Install shower faucet properly,and connect to curved leg on the wall



Step 4.Test function of shower set, clean the set

Useage function instruction







FLOW RATE

Detalles	
FLOW RATE REF	BDR031-4
water outlet mixer water 0.1Mpa(L/MIN)	5.09
water outlet mixer water 0.3Mpa(L/MIN)	8.46
water outlet mixer water 0.5Mpa(L/MIN)	10.44
water outlet singer cold water 0.1Mpa(L/MIN)	5.17
water outlet singer cold water 0.3Mpa(L/MIN)	8.43
water outlet singer cold water 0.5Mpa(L/MIN)	10.57
hand shower mixer water 0.1Mpa(L/MIN)	5.4
hand shower mixer water 0.3Mpa(L/MIN)	10
hand shower mixer water 0.5Mpa(L/MIN)	13.67
hand shower singer cold water 0.1Mpa(L/MIN)	5.58
hand shower singer cold water 0.3Mpa(L/MIN)	10.38
hand shower singer cold water 0.5Mpa(L/MIN)	14.14


water outlet



hand shower



DINAMARCA
Series

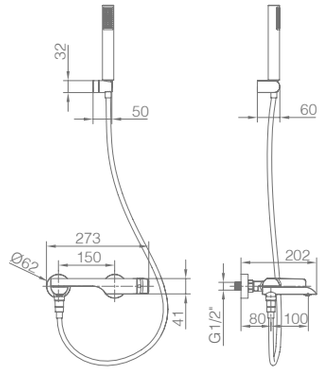

Product sizes (cm)	28*16*12.2
Weight (kg)	2.4
Guarantee	5 years
Max Preassure (bar)	5
Min Preassure (bar)	0.5
Optimum preassure (bar)	1-4 (Recommended 3)
Max. temperature	85ºC
Min temperature	65ºC

DINAMARCA
Series

CERTIFIES

That all our products, provided that they are used in normal conditions or installed in accordance with current standards, are guaranteed against any manufacturing defect for a period of five years, except for products purchased before January 1, 2020, which will have the mand atory coverage of 2 years from the date of invoice.

Requirements and exclusions

Failure to comply with the instructions for assembly, use and maintenance of our products on the packaging and in our catalogue and published on our website: www.imexproducts.es, releases IMEX PRODUCTS, S.L. from any liability.

In any case, the acceptance of the defect by our technical department is necessary. In addition, transport costs will be charged only in the event that on IMEX PRODUCTS, S.L. technician determines the proper functioning of our products.

IMEX PRODUCTS, S.L. will decide to repair the product or replace it. It will be necessary to present the purchase invoice.

Assemnly, maintenance or repairs carried out by non-specoalists re excluded from the warranty.

Wearing parts such as hoses, handles, seals, filters, aerators, etc. are not covered by the warranty.